



Power cable accessories catalogue

**Tools and
Equipment**



Jointing Tech



THE POWER TO DELIVER

jt Jointing Tech



If you need us, just call your nearest branch or engineer.

We know that out of hours problems are the worst type for companies to encounter and that getting help can be difficult and frustrating.


Jointing Tech offer a 24/7 breakdown service which may make it possible for you to complete your installation. With an extensive stock profile and a knowledgeable team Jointing Tech could offer the products and solution you need.

Please note that this service may attract call out and delivery charges.

Tools and Equipment

Contents

Hand Hydraulic Crimp Tools	206	Hydraulic Hole Punching Tools	213
Battery Operated Hand Crimpers	207	Cable Preparation Tools	214
Hydraulic Press Hands	208	Cutting/Preparation Tools	215
Hydraulic Pumps	209	Tool Hire	218
Battery Operated Hand Cutters	210	Pfisterer/Spiking Tool	220
Hydraulic Cutting Tools	211	Safety Equipment	221
Crimp Dies	212	Gas Torch Kits & Accessories	223
		Band-It Tooling	224

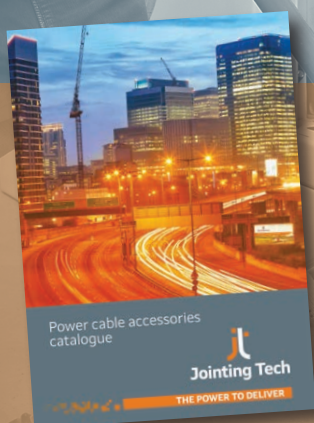

This 'mini-catalogue' focusing on Tools and Equipment is part of a larger, more comprehensive Power Cable Accessories Catalogue produced by Jointing Tech.

Please visit our website for more information and/or a copy of the full catalogue.

www.jointingtech.co.uk

Hydraulic Hand Crimper 10-400mm²

FEATURES

- Self contained, robust and sturdy while remaining lightweight
- Features a double speed action with rapid approach and slower more powerful speed for crimping
- 180° rotation for ease of operation and comfort for operator
- Built in safety valve will bypass the oil supply when maximum pressure is reached
- Accepts ME-C hex dies and MA-C and PA-C nest and indent
- Complete with carry case for tool and dies



Hydraulic crimping tools

Part Number	Die Range	Conductor Size
HT131	ME-C	10-400mm ²

Hydraulic Hand Crimper 10-150mm²

FEATURES

- Self contained, robust and sturdy while remaining lightweight
- Features a double speed action with rapid approach and slower more powerful speed for crimping
- 180° rotation for ease of operation and comfort for operator
- Built in safety valve will bypass the oil supply when maximum pressure is reached
- Accepts ME hex dies and MA and PA nest and indent
- Complete with carry case for tool and dies



Hydraulic crimping tools

Part Number	Die Range	Conductor Size
HT45-E	ME	10-150mm ²

Hand Hydraulic Hand Crimper 10-240mm²

FEATURES

- Self contained, robust and sturdy while remaining lightweight
- Features a double speed action with rapid approach and slower more powerful speed for crimping
- 180° rotation for ease of operation and comfort for operator
- Built in safety valve will bypass the oil supply when maximum pressure is reached
- Accepts ME-50 hex dies and MA-50 and PA-50 nest and indent
- Complete with carry case for tool and dies



Hydraulic crimping tools

Part Number	Die Range	Conductor Size
HT51	ME-50	10-240mm ²

Hydraulic Battery Crimper 10-240mm²



FEATURES

- B500 is the first of a new generation of hand-held cordless tools heralding a significantly advantageous evolution from current models
- Equipped with Li-Ion 18V 4 Ah battery offering greater capacity than the previous 14.4V Ah version
- Suitable for crimping conductors up to and including 240mm²
- Complete with LED light for darker working areas
- Faster compression and greater crimping force result from new two-speed hydraulic system
- Fitted with a maximum pressure sensor for enhanced precision and repeatability
- New OLED display provides essential real time data including force generated, battery life and number of work cycles left before maintenance
- 180° head rotation
- Consists of 2 x batteries, battery charger, shoulder strap and carry case

Part Number	Die Range	Conductor Size
B500	ME-50	10-240mm ²

Hydraulic Battery Crimper 10-400mm²



FEATURES

- Born of the renowned B135-C crimping tool, first into the market is the 132kN B1350-CE, suitable for a wide range of connectors up to 400mm² using the die sets common to the Cembre 130kN tooling range
- Equipped with Li-Ion 18V 4 Ah battery offering greater capacity than the previous 14.4V Ah version
- Faster compression and greater crimping force result from new two-speed hydraulic system
- Fitted with a maximum pressure sensor for enhanced precision and repeatability
- New OLED display provides essential real time data including force generated, battery life and number of work cycles left before maintenance
- Complete with LED light for darker working areas
- 180° head rotation
- Consists of 2 x batteries, battery charger, shoulder strap and carry case

Part Number	Die Range	Conductor Size
B1350-CE	ME-C	10-400mm ²

Hydraulic Press Head 10-400mm²

FEATURES

- Hydraulic press head complete with quick release coupling to connect head to pump with max operating pressure of 700 bar
- Lightweight at only 3.8kg
- Compatible with a range of dies that accept Cu/Al lugs/splices and C tap connectors at LV and HV voltages
- Head compatible with both PO7000/B70-P24 and EP10 electric pump



RHC 131 type hydraulic press head for 10-400mm² cables

Part Number	Die Range	Conductor Size
RHC131	ME-C	10-400mm ²

Hydraulic Press Head 400-630mm²

FEATURES

- Hydraulic press head complete with quick release coupling to connect head to pump with max operating pressure of 700 bar
- Lightweight at only 5.5kg
- Adaptor type AU230-130D is available as an optional extra enabling the head to utilise smaller ME-C, MA-C and PA-C dies
- Head compatible with both PO7000/B70-P24 and EP10 electric pump



ECW-H3D type hydraulic press head for 400-630mm² cables

Part Number	Die Range	Conductor Size
ECW-H3D	ME-3D	400-630mm ²

Hydraulic Press Head 400-1000mm²

FEATURES

- Hydraulic press head complete with quick release coupling to connect head to pump with max operating pressure of 700 bar
- Weight is 18kg
- Complete with two handles on either side of the head for ease of use
- Adaptor type AU520-130C is available as an optional extra enabling the head to utilise smaller ME-C, MA-C and PA-C dies
- Head compatible with both PO7000/B70-P24 and EP10 electric pump



RHU-520 type hydraulic press head for 400-1000mm² cables

Part Number	Die Range	Conductor Size
RHU-520	ME-520	400-1000mm ²

Electric Pump



Foot and electric hydraulic pumps

FEATURES

- Electrically driven hydraulic pump, powered by 110V/50-60hz single phase electric motor
- Piston type high pressure pump supercharged by a low pressure pump
- Extremely durable yet lightweight and operates under low-line voltage conditions
- Comes complete with a remote hand controller with 10 foot cord
- Operates up to 10000PSI

Part Number	Description
EP10 ELECTRIC PUMP	110 Volt

Foot Pump



PO-7000 hydraulic pump

FEATURES

- Foot operated hydraulic pump developing a maximum of 700 bar of pressure
- Mounted on a solid shaped stand giving the pump stability during operation
- Complete with a 3m high pressure hose with female quick release coupler
- Lightweight at only 9.8kg
- Complete in plastic hard wearing carry case

Part Number	Description
PO 7000	Foot Pump

Electro-Hydraulic Pump (battery)



B70M-P24 lightweight pump

FEATURES

- Operating at 24v dc by battery for independent use and developing 700 bar pressure
- Complete with 3m hose and quick couplers, remote control, shoulder strap, external battery charger and canvas holdall for carrying accessories
- Also available in an insulated version - contact our sales team for more info

Part Number	Description
B70M-P24	Hydraulic Electric Pump
TRS-B70	Canvas Rucksack For B70m-P24
SPARE BATTERY	For The B70m-P24

Hydraulic Battery Cutter 50mm Max

FEATURES

- B-TC500E is the next generation of Cembre cordless hydraulic tools and features significant advantages over current models
- Has a NEW Li-Ion 18V 4 Ah battery offering higher capacity than 14.4 V 3 Ah
- High strength steel blades are heat treated to ensure long lifespan
- Suitable for copper and aluminium cable having a max diameter of 50mm
- The head can rotate 180 degree to enable the operator to work in the most comfortable position
- B-TC500E comes with a fitted LED light for a safer working area
- Maximum pressure sensor and pressure relief valve assures precision and repeatability
- The new generation of tooling boasts a OLED display which provides real time information including crimping force, battery life, life cycle with service intervals.
- Comes complete with shoulder strap, spare battery, charger and carry case



Part Number	Maximum Cutting Diameter	Weight
B-TC500E	50mm	5.8kg

Hydraulic Battery Cutter 65mm Max

FEATURES

- B-TC650-SCE is the next generation of Cembre cordless hydraulic tools with significant advantages over current models
- Features NEW Li-Ion 18V 4 Ah battery offering higher capacity than 14.4 V 3 Ah
- High strength steel blades are heat treated to ensure long lifespan
- Suitable for copper and aluminium cable having a max diameter of 65mm
- The head can rotate 180 degree to enable the operator to work in the most comfortable position
- B-TC650-SCE comes with a fitted LED light for a safer working area
- A maximum pressure sensor and pressure relief valve assures precision and repeatability
- The new generation of tooling boasts an OLED display which provides real time information including crimping force, battery life, life cycle with service intervals
- Comes complete with shoulder strap, spare battery, charger and carry case



Part Number	Maximum Cutting Diameter	Weight
B-TC650E	65mm	6.4kg

Hand Held Cutting Tools



FEATURES

- Hydraulic hand tools designed to cut both copper and aluminium cables
- Fast advance speed for rapid approach of the blades to the cable and a slower more powerful speed for cutting
- Blades are manufactured from high strength special steel, heat treated for longer service life
- Heads can be easily opened to allow cutting of running cables
- HT-TC051 can rotate the head 90° with the HT-TC0851 being able to complete 180° of rotation
- Both tools have a bypass oil safety valve for when tools are at maximum pressure
- HT-TC051 comes complete in a carry bag with the HT-TH0851 coming in a carry case

Part Number	Maximum Cutting Diameter	Weight
HT-TC026	25mm	3.2kg
HT-TC051	50mm	4.4kg

Part Number	Maximum Cutting Diameter	Weight
HT-TC0851	85mm	6.6kg

Hand Held Cutting Tools



FEATURES

- Hydraulic cutting heads designed to cut both copper and aluminium cables
- Fast advance speed for rapid approach of the blades to the cable and a slower more powerful speed for cutting
- Blades are manufactured from high strength special steel, heat treated for longer service life
- Heads can be easily opened to allow cutting of running cables
- Working pressure of all cutting heads are 700Bar Max
- All complete with a quick release male coupling for connection to hydraulic pump
- All complete with a handle which allows the most comfortable positioning of the head onto the cable

Part Number	Maximum Cutting Diameter	Weight
TC096	95mm	7.9kg
TC085	85mm	4.9kg

Part Number	Maximum Cutting Diameter	Weight
TC120	120mm	9.5kg

Cembre Dies

ORDERING

■ To ensure the correct dies are selected please contact our sales team

Tool Type	Part Number	Conductor size range mm ²	Conductor	Number of dies in range	Die Type
LV Dies For "G Type 131 Heads"	MA-C	10-300	Copper	12	Nest
LV Dies For "G Type 131 Heads"	PA-C	10-300	Copper	4	Indentor
LV Dies For "G Type 131 Heads"	ME-C	10-400	Copper	13	Hexagonal
LV Dies For "Ecw-3D Head"	MA-3D	400-630	Copper	3	Nest
	PA-3D	400-630	Copper	2	Indentor
	ME-3D	400-630	Copper	3	Hexagonal
	AU230-130D		Copper	1	Adaptor Die For "G Type 131 Head"
LV Dies For "Rhu-520 Head"	MA-520	400-1000	Copper	5	Nest
	PA-520	400-1000	Copper	2	Indentor
	MK-520	400-1000	Copper	5	Hexagonal
	AU520-130C		Copper	1	Adaptor Die For "G Type 131 Head"
HV Dies For "G Type 131 Heads"	ME-C	10-400	Copper	13	Hexagonal
HV Dies For "Ecw-3D Head"	ME-3D	400-630	Copper	3	Hexagonal
HV Dies For "Rhu-520 Head"	MK-520	400-1000	Copper	5	

Cembre LV & HV Copper Terminals

Conduc- tor Size (mm ²)	Terminals			Tool				
Stranded	Cembre LV Lugs	Cembre LV Splices	Cembre HV Lugs	HT45E / B35-45	HT50 / B51 / RH50	HT131 / B135	ECW-H3D	RHU-520
0.25-2.5	A03-M-A06-M	L03-M-L06-M						
4-6	A1-M	L1-M		ME1	ME1-50			
10	A2-M	L2-M		ME2	ME2-50	Me2-c	AU230-130D + ME2-C	Au520-130C + Me2-C
16	A3-M	L3-M	2A3-M	ME3	ME3-50	Me3-c	AU230-130D + ME3-C	Au520-130C + Me3-C
25	A5-M	L5-M	2A5-M	ME5	ME5-50	Me5-c	AU230-130D + ME5-C	Au520-130C + Me5-C
35	A7-M	L7-M	2A7-M	ME7	ME7-50	Me7-c	AU230-130D + ME7-C	Au520-130C + Me7-C
50	A10-M	L10-M	2A10-M	ME10	ME10-50	Me10-c	AU230-130D + ME10-C	Au520-130C + Me10-C
70	A14-M	L14-M	2A14-M	ME14	ME14-50	Me14-c	AU230-130D + ME14-C	Au520-130C + Me14-C
95	A19-M	L19-M	2A19-M	ME19	ME19-50	Me19-c	AU230-130D + ME19-C	Au520-130C + Me19-C
120	A24-M	L24-M	2A24-M	ME24	ME24-50	Me24-c	AU230-130D + ME24-C	Au520-130C + Me24-C
150	A30-M	L30-M	2A30-M	ME30	ME30-50	Me30-c	AU230-130D + ME30-C	Au520-130C + Me30-C
185	A37-M	L37-M	2A37-M		ME37-50	Me37-c	AU230-130D + ME37-C	Au520-130C + Me37-C
240	A48-M	L48-M	2A48-M		ME48-50	Me48-c	AU230-130D + ME48-C	Au520-130C + Me48-C
300	A60-M	L60-M	2A60-M			Me60-c	AU230-130D + ME60-C	Au520-130C + Me60-C
400	A80-M	L80-M	2A80-M			Me80-c	ME80-3D	Me80-520
500	A100-M	L100-M	2A100-M				ME100-3D	Me100-520
630	A120-M	L120-M	2A120-M				ME120-3D	Me120-520
800	A160-M	L160-M	2A160-M					Me160-520
1000	A200-M	L200-M	2A200-M					Me200-520

ORDERING

- Aluminium dies also available
- Circumferential and Hex DIN dies also available

Cordless Hydraulic Puller-Type Hole Punching Tool B-FL750E



FEATURES

- Cordless hydraulic tool, for hole punching stainless steel, soft metal, fibreglass and plastic sheet up to 3.5mm thick
- The balanced punching head pivots 180° through a full 360° rotation
- OLED display provides essential real time information including crimp force, battery life and service schedule
- Tool comes complete with shoulder strap, spare battery, charger, TD-11 & TD-19 puller, spiral bit and carrying case

Part Number	Hole Punch Size	Weight
B-FL750E	15.5mm-120mm ²	5.1kg

HT-FL75



FEATURES

- Hand operated hydraulic tool designed for hole punching stainless steel, soft metal, fibreglass and plastic sheet upto 3.5mm thick
- Compact, lightweight and easy to handle
- Tool comes complete with plastic carry case, TD11 and TD19 pullers and an 11.5mm spiral bit

Part Number	Hole Punch Size	Weight
HT-FL75	15.5mm-120mm ²	3.7kg

RH-FL75



FEATURES

- Hydraulic head designed for hole punching stainless steel, soft metal, fibreglass and plastic sheet up to 3.5mm thick
- Compact, lightweight and easy to handle
- Quick release coupler for connection to hydraulic pump
- Tools comes complete with TD11 and TD19 pullers and an 11.4mm spiral bit

Part Number	Hole Punch Size	Weight
RH-FL75	15.5mm-120mm ²	1.9kg

For more details on hole punch dies please contact your nearest branch.

Cable Stripping Tools

FEATURES

- Tools for cable stripping low and medium voltage cables

Part Number	Description
CERAMIC KNIFE	Utility knife with non-conductive ceramic blade
EXRM-0607	Wooden Handled Cable Stripping Knife
EXRM-0947	Hook Knife For Outersheath Stripping
120-CS	Insulated Hack Knife
EXRM-1004	Paper Cable Insulation Stripping Pliers
CABLE KNIFE	Utility knife complete with Stanley blade and cover



A selection of cable stripping tools

Universal Plastic Sheath Stripper

FEATURES

- Single hand operation
- Complete with two depth fittings

Part Number

KMS

KMS BLADE



Outer sheath removal tool

Diameter Tape

FEATURES

- Used to confirm the diameter for cables and cable insulations

Part Number

IT-1000-010

Description

Jointer's diameter measuring tape



Diameter tape

Hand Cutting Tools



Hand tools for cable core cutting up to 500mm²

FEATURES

- Long handles for easy cutting
- Used for unarmoured cables and cutting of conductors and screen wires
- Please refer to hydraulic section for cutting of armoured cables

Part Number	Conductor Size
5116660250	6-250mm ²
5116660500	6-500mm ²

Roller Chain Tongs



Armour wire removal tool

FEATURES

- For the removal of the steel wire or aluminium wire armour of power cables
- Adjustable to suit armour diameters up to 76mm

Part Number	Over Armour Diameter
RCT155	20 - 76mm
RCT SPARE CHAIN	-

RC52 Ratchet Cutting Tool



Ratchet cutting tools for cables

FEATURES

- Designed for use on copper and aluminium conductors
- High quality steel ratchet mechanism for optimised mechanical advantage
- Moveable blades can be easily released
- Not for use on armoured cables
- See hydraulic section for cutting of armoured cables

Part Number	Cutting Range
RC-52	Up to 52mm
KT-4	Up to 52mm

HP3 Ratchet Crimp Tool



HP3 Ratchet Crimp Tool

FEATURES

- Compact, easy to use manual tool
- Treated steel crimp jaws with high mechanical properties
- Factory set ratchet for crimping control (automatic handle opening upon completion of crimping operation)
- Emergency release lever which, if necessary, opens the crimp jaws before their complete closure
- Ergonomically designed non-slip moulded plastic grips

Part Number	Size
HP3	0.5 - 6mm

Outer Sheath Strippers

FEATURES

- Can also be used for removal of primary insulation and lead alloy sheaths
- For circular and longitudinal cuts
- Fully insulated stripper available (PG3-EC)

Part Number	Sheath Diameter
PG2-HTA	21-35mm
PG3-HTA	26-51mm
PG3-EC	26-51mm

Part Number	Sheath Diameter
PG4-HTA	47-75mm
PG5-HTB	65-95mm
PG6-HTB	80-125mm



Outer sheath removal tool

Peelable Semi-Conductive Screen Stripper

FEATURES

- The LHM tools allow simple and easy removal of peelable semi-conductor
- The tool works by creating a precise spiral incision with an offset circular blade on the semi-conductor which allows it to be neatly unwrapped
- The remaining length of exposed semi-con can be set depending on the tool used

Part Number	Diameter over Screen
LHM1R30/45	14-40mm
LHM2R30/60	38-60mm



For use on easy peel cable screens

Pre-set Scoring Tool

FEATURES

- Two different tools for use at either 11 or 33kV
- Pre-set blade depth allows easy scoring and screen removal

Part Number	Diameter	Use with
TT2352/1	0.4mm	For 11kV
TT2352/2	0.6mm	For 33kV




For use on easy peel cable conductive screens

Bonded Screen Removal Tool

FEATURES

- This tool enables the user to remove and chamfer the bonded semiconductor in a clean and swift manner without the use of silicon
- The blade is adjustable from 0.4mm to 1.4mm with "clicking knob" (0.1mm for each click)
- The angle of the chamfer is 8°
- Tool will accommodate insulation

Part Number	Diameter over Screen
CWB18-60	18-60mm

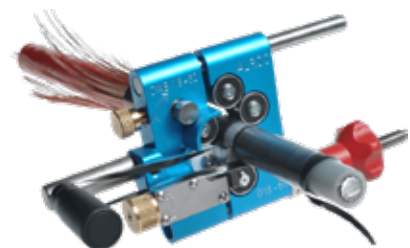

For removal and chamfer of bonded screen

Bonded Screen Removal Tool



Designed to remove the cable's bonded screen

FEATURES

- Removes bonded semi conductive screens from XLPE cables
- Depth adjustment from 0-1.5mm
- Application range over semi conductive screen is between 0-52mm O/D
- Stripping can be done starting at any position on the cable
- Advised to be used on Vulcanized, extruded and bonded semi conductive screens

Part Number	Insulation Diameter	Depth of Cut
BSR700	10-52mm	0-1.5mm
BSR700 SPARE BLADE	-	-

Adjustable Insulation Tapering Tool



Provides a chamfered finish at the screen removal points

FEATURES

- LHA tool tapers the end of XLPE insulation and allows a better penetration of pre-moulded joints

Part Number	To make a Chamfer
LHA	14 - 40mm
LHA2	38-60mm
LHA3	60-80mm

Screen and Insulation Removal Tool HVIA Stripper 35/90



FEATURES

- Stripping tool for extruded and bonded cable screens and primary insulation for cable diameter from 35-90mm or 75-150mm
- For use on medium and high voltage cables
- Adjustable to cable diameter via the red twist handle
- Tool is supplied with blades packed separately in the case
- Advised to apply a thin layer of silicone lubricant to screen for easy movement

Part Number	Cable Diameter
HVIA-STRIPPER 35-90	35-90mm
HVIA-STRIPPER 75-150	75-150mm

Toolout Hire

FEATURES

- Jointing Technologies have the largest hire fleet of crimping and cutting tools in the country
- All available on a next working day delivery (on orders placed before 4pm)
- All tools are calibrated and checked prior to dispatch to ensure they are in full working order

Hydraulic Crimping



FEATURES

- Also available in hand tool version
- Dies available 10-1000mm² copper/aluminium LV/HV
- Please state cable type and size

Hydraulic Cutting



FEATURES

- Also available in hand tool version
- TC120 cutting head - max cutting diameter of 120mm
- HT-TC085 cutting hand tool - max cutting diameter of 85mm

Battery Crimping



FEATURES

- Dies available 10-1000mm² copper/aluminium LV/HV
- Please state cable type and size

Battery Cutting



FEATURES

- TC120 cutting head - max cutting diameter of 120mm

Hydraulic Crimp & Cut



FEATURES

- Dies available 10-1000mm² copper/aluminium LV/HV
- TC120 cutting head - max cutting diameter of 120mm
- Please state cable type and size

Battery Crimp & Cut



FEATURES

- Dies available 10-1000mm² copper/aluminium LV/HV
- TC120 cutting head - max cutting diameter of 120mm
- Please state cable type and size

FEATURES

- Long term hire deals available - Please contact our sales department for further information
- All hire prices include die sets - to ensure the correct sizes are supplied please advise at time of order
- Dies are available for copper and aluminium cables, C-taps and elbow contacts

Cable Spiking Tool

FEATURES

- Used for spiking power cables prior to jointing, terminating or repair



Pfisterer Tool

FEATURES

- Standard size 1, 2, 3 tool
- Larger sizes 4-5S and 6 also available on request



Cable Jack & Spindle



FEATURES

- Both 3 or 6 ton versions available
- Due to size and weight additional carriage may apply on this item. Contact your local sales office for more information

TDUX Duct Seal Inflation Tool



FEATURES

- Complete with pressure gauge to ensure correct installation
- Please order gas separately - see page 200

Tool Repair & Calibration

FEATURES

- Cembre and Prysmian approved repairer
- Calibration certificates supplied
- Estimates provided prior to works
- Reconditioned tools available
- All tools must be calibrated after each hire to comply with BS7671 (UK Wiring Regulations)



Pfisterer Tool

FEATURES

- Tools comprises of the following
 - Carry case
 - Compression head size 1,2,3 including pull off head
 - Impact device 1,2,3 for preassembly of connector contacts
 - Hydraulic 60816 Compression tool
 - Chain for suspension of assembly lever and hole bar
 - T-handle screw driver SW6
 - Assembly lever for pressing and releasing the bell housing
- For installation of Connex connectors size 1, 2 and 3. For sizes 4, 5 and 6 - please contact our sales team



Connex installation tool

Part Number

PFISTERER TOOL

Description

For size 1, 2, 3

Spiking Tool

FEATURES

- The Bowthorpe Cable Spiker is intended to prove that a selected cable, previously disconnected, is in fact dead before site work commences
- Silent in operation and of a robust and rigid construction
- The kit comprises a hand operated hydraulic pump connected by a fully insulated hose to a hydraulic ram which carries the diamond shaped chisel cable spiker
- All component parts are supplied in a stout wooden carrying case
- Ram is mounted on a shaped tubular steel body which is located and held around the cable up to 102mm diameter
- An independent earth cable 6m x 50mm² with suitable connecting lugs are also supplied
- **WARNING:**
This spiker must not be used without an earth cable connected and properly earthed as failure to do so could have serious consequences for the operator in the event of a live cable being pierced



Cable spiker kit


Part Number

SG1

Description

Up to 102mm cable diameter

Rubber Switchgear Matting

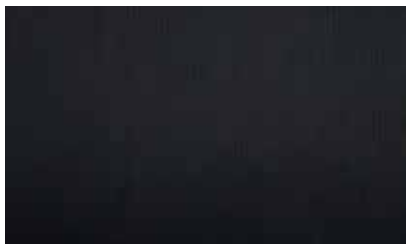

FEATURES

- Maximum coil size is 10 metres
- Can be cut to specific length - price always rounded up to next complete metre

Part Number	Thickness	Tested to	Working Voltage
LVRM6	6mm	15,000 volts	450 volts
LVRM9	9mm	15,000 volts	650 volts
HVRM	4mm	50,000 volts	11,000 volts

Insulating Gloves



FEATURES

- Fully insulating gloves each test stamped for working voltages ranging from 500V-36000V
- Manufactured to EN60903
- Available in four sizes
- Gloves are tested by inflation and visual inspection carried out by a pneumatic glove tester

Part Number	Voltage Class	Size
0583	00	8, 9, 10, 11
0584	0	8, 9, 10, 11
0585	1	8, 9, 10, 11
0586	2	8, 9, 10, 11
0587	3	8, 9, 10, 11
0588	4	8, 9, 10, 11

Leather Outer Gloves



FEATURES

- Fully insulated gloves each test stamped for working voltages ranging from 500V to 36000V
- Worn over the insulating gloves to protect against mechanical hazards and electrical arcing
- Available in sizes 8-12

Part Number	Size
058L	8 - 12

Dielectric Boots

FEATURES

- Dielectric boots in various sizes from 6 to 13
- Certified protection against electric shock
- Oil and chemical resistant sole
- Conforms to EN345-1.SB and EN50321 Class 0
- Overall boot tested to 20kV

Part Number	Size
871906/40	6
871907/41	7
871908/42	8
871909/43	9

Part Number	Size
871909/44	10
871911/45	11
871911/46	12
871911/47	13



Dielectric Boots

Safety Hook

FEATURES

- Safety rescue hook used for retrieval of victims of electric shock
- Rated for systems up to 60kV
- Safeguards the life of the first aider
- Should be placed in a prominent and easily accessible position near to the live site

Part Number	Voltage Class	Size (Length)
509049	Up to 60kV	1950mm
509048	Up to 1kV	1000mm



Safety Hooks

Safety Rescue Hook Station

FEATURES

- The hook station offer a safe storage place for the rescue hook
- Detailed on the hook station are basic life support checks and techniques for the first aider to administer prior to paramedics arriving
- Hook station and hook should be in a prominent and easily accessible position near to the live site
- Hook not included

Part Number	Voltage Class	Size (Length)
509050	1kV	580 x 450
509051	60kV	580 x 805



Safety Rescue Hook Station

Gas Torch Kit complete with Burner, Hose and Handle



Gas torch kit

FEATURES

- Kit designed specifically for jointers
- Two different burners for the complete range of heat shrinking applications
- Please note all items, including cut-to-length hose, can be bought separately

Part Number Kit Contents

TOL/GTK	Complete safety handle, soft flame burner, 4m hose with all end fittings attached, carry case and regulator
----------------	-------------------------------------------------------------------------------------------------------------

Handle for Gas Torches



Gas torch handle

FEATURES

- Piezo ignition with instant trigger on/off function
- Bayonet fitting for burners
- Valve for precise flame setting
- Hose connection BSP 3/8" LH

Part Number

Working Pressure Bar

H3366	1.5-4
--------------	-------

Hot Air and Soft Flame Burners



Hot air burners

FEATURES

- Hot-air burners with powerful windproof hot-air streams for heat shrinking
- 3349 ideal for shrinking in confined spaces and fibre optic closures
- 3359 is an extra small hot-air burner incorporating a heat reflector, ideal for signal systems, traffic lights, alarm systems, marine applications, automobiles and other vehicle repairs
- Work pressure - 2 bar
- Soft flame design ideal for cable work and other heat shrinking applications
- Soft flame burners with sweeping, powerful yellow and blue soot-free windproof flames

Part Number	Type	Burner Diameter
HAB32-15 (3349)	Hot Air Burner	32x15mm
HAB 25 (3359)	Hot Air Burner	25mm
SFB28 (334791)	Soft Flame Burner	28mm

Part Number	Type	Burner Diameter
SFB38 (334191)	Soft Flame Burner	38mm
SFB50 (334891)	Soft Flame Burner	50mm

Regulator for Gas Torches



Gas torch regulator

FEATURES

- Suitable for use with the H3366 handle
- Hose connection bsp 3/8" lh

Part Number

Working Pressure Bar

3091-21	2
----------------	---

Light and Heavy Duty Applications

FEATURES

- C001 tool is for light and heavy duty band and buckle products
- Tensions up to 2400lbs - for use on band up to 3/4"
- C007 tool is for light duty coated or uncoated band and bandfast clamps
- Hand ratchet mechanism

Part Number

C001 TOOL

C075 TOOL - BANTAM



Cable Tie Tensioning Tool

FEATURES

- AE200 tensions all re-useable Band-it ties
- AE201 hook tool tensions all re-usable and multilock ties

Part Number

AE200 TOOL

AE201 TOOL



Hand tension tool

Cable Tie Tensioner with Auto Cut Mechanism

FEATURES

- M503 tool - adjustable/variable tension prevents over tensioning of Multi-lok ties
- Can be used on both coated and uncoated Multi-lok ties
- K502 tool - adjustable/variable tension prevents over tensioning of Ball-lok ties
- Can be used on both coated and uncoated Ball-lok ties
- KE922 manual tool for use with multi-lok and Ball-lok ties
- Automatic cut off
- Weight 0.43kg

Part Number

M503 TOOL

K502 TOOL



For use with Band-it coated and uncoated Multi-lock ties

Cable Tie Tensioner and Cutter

FEATURES

- Variable/adjustable tension prevents over tensioning of ties
- Can be used on both coated and uncoated Ball-Lok ties
- Can be used on both coated and uncoated ties

Part Number

KE9229



For use with Band-it Multi-lok and Ball-lok ties

Power Consumables



Jointing Tech

Woking 01483 747747 Norton Canes 01543 450555 Bristol 01454 222555

Product Search

Home About Us Products Technical Industries News Contact Us

EXCLUSIVE ONLINE OFFER!

SAVINGS ACROSS OUR RANGE OF EVEREADY ENERGISER AND DURACELL INDUSTRIAL BATTERIES!

Up to 30% OFF

Scotch Tape

Jointing Tech supply a wide range of power consumable items that allow you to complete your installation.

These include:

- Batteries
- Fixings
- General Consumables
- Lubricants
- Cleaners
- Pollution Control
- Tapes
- Electrical Ancillaries

Whether it be batteries for your test equipment, insulation tape for cable harnessing or cleaning lubricants for contact or switchgear, Jointing Tech are the single solution for all your electrical ancillary requirements.

DELIVERY...
Free Next Day Delivery* for orders over £100

STOCK...
Millions of items in stock across the UK

Manufacturer Brands

DURACELL[®] YUASA TE furse Prysmian 3M DURACELL[®] YUASA TE

New Products Power Consumables

www.jointingtech.co.uk/power-consumables

Request a Call Back

THE POWER TO DELIVER



Jointing Tech

Jointing Tech Branches:

Woking

Unit 19
Woking Business Park
Albert Drive
Woking
GU21 5JY

Tel: 01483 747747

Bristol

The Alpha Centre
Armstrong Way
Great Western Business Park
Yate
Bristol
BS37 5NG

Tel: 01454 322555

Norton Canes

Unit 15-16
Bellsizes Close
Norton Canes
Staffordshire
WS11 9TQ

Tel: 01543 450555

Quality and Industry Accreditation



Jointing Tech Group:

Langley Engineering Ltd

16 The Markham Centre
Theale
Reading
Berkshire
RG7 4PE

Tel: 0118 930 5990

Jointing Tech – Trace Heating Department

Unit 4 Eversley Way
Thorpe Industrial Estate
Egham
Surrey
TW20 8RG

Tel: 01784 279005

Jointing Technologies is part of Toolout Limited.
© Toolout Limited. All rights reserved.
Registered in England. Company Number 2281668

www.jointingtech.co.uk

